


zehnder *forma*

zehnder




Classical appearance and modern tubing-connection technology give the Zehnder Forma design radiator its unique identity. The horizontal tubes are placed over the vertical ones. The cross-connection of tubes gracefully highlights the merits of Zehnder Forma and livens up its appearance.

Thanks to the high thermal output rate, Zehnder Forma will warm you during inclement weather. Zehnder Forma radiators may be water-filled or electric.

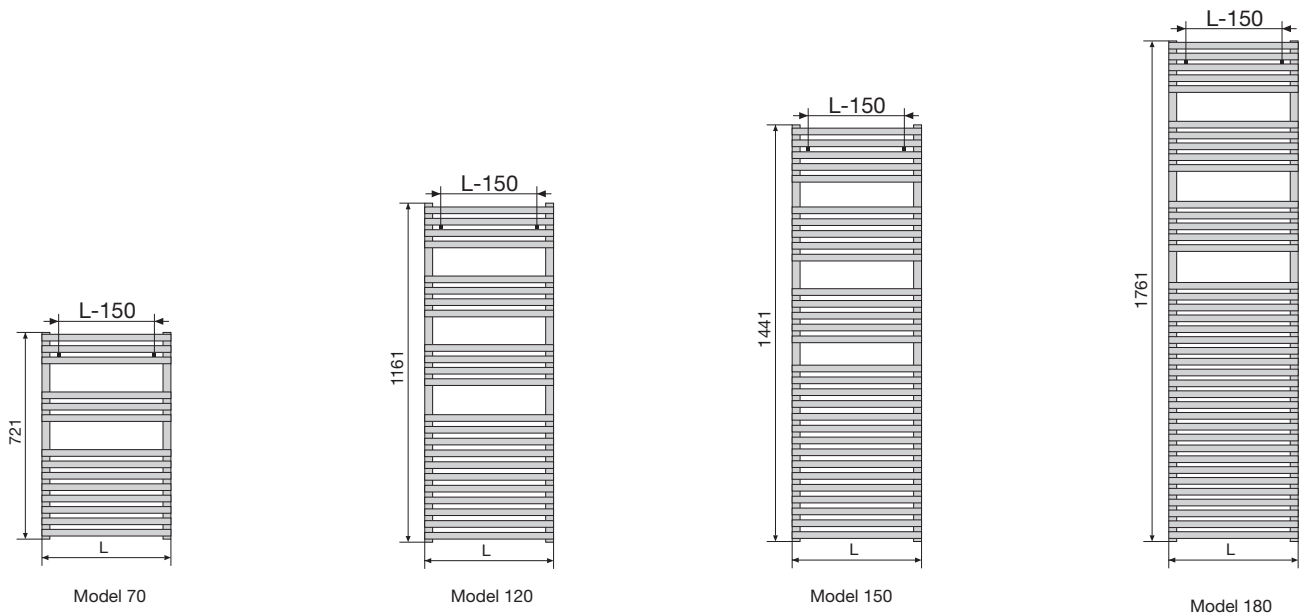

Material: Steel
 Operating pressure: up to 4 bar
 Connection: From below, G 1/2"
 Coating: Enamel (Colours shown in Zehnder catalogue)

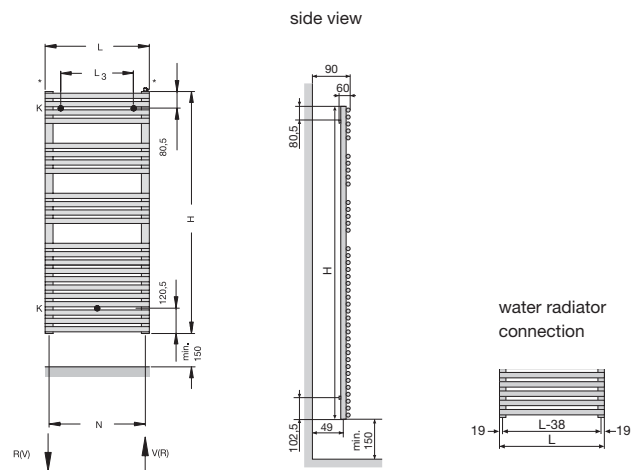

Models for closed heating systems:

Model	Overall height (mm)	Overall length (mm)	Heat capacity (W)	
			$\Delta T=50K$	$\Delta T=60K$
LF-070-050	721	496	378	476
LF-070-060	721	596	442	556
LF-120-050	1161	496	612	770
LF-120-060	1161	596	707	889
LF-150-060	1441	596	927	1166
LF-180-050	1761	496	973	1224
LF-180-060	1761	596	1133	1425
LF-180-075	1761	746	1416	1781


Electric models (electric heater DBM)

Model	Overall height (mm)	Overall length (mm)	Immersion Electric rating (W)
White and coloured			
LFE-070-050-DD	841	496	300
LFE-090-050-DD	1041	496	500
LFE-120-050-DD	1281	496	750
LFE-170-050-DD	1801	496	1000

zehnder forma



Material: Steel
 Operating pressure: up to 4 bar
 Connection: From below, G 1/2"
 Coating: Chrome-plated
 (not all sizes)

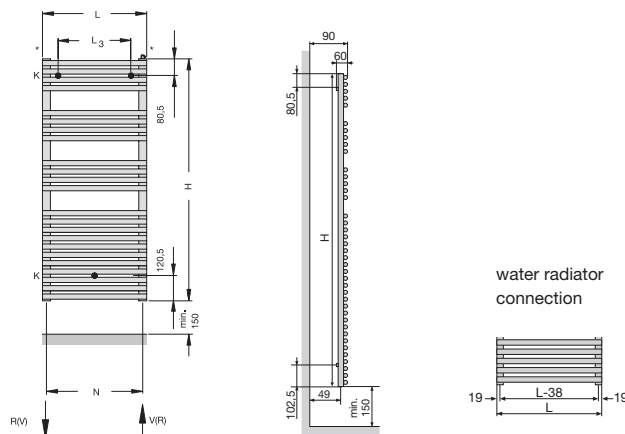

Chrome plated models for closed heating systems:


Model	Overall height (mm)	Overall depth (mm)	Heat capacity (W)	
			$\Delta T=50K$	$\Delta T=60K$
LFC-070-050	721	496	276	296
LFC-120-050	1161	496	447	480
LFC-120-060	1161	596	516	554
LFC-150-050	1441	496	581	624
LFC-180-050	1761	496	710	763
LFC-180-060	1761	596	827	888

Chrome plated electric models (electric heater DBM)

Model	Overall height (mm)	Overall depth (mm)	Immersion Electric rating (W)
White and coloured			
LFEC-090-050-DD	1041	496	300
LFEC-120-050-DD	1281	496	500
LFEC-170-050-DD	1801	496	750

zehnder forma double layer

Material: Steel
 Operating pressure: up to 4 bar
 Connection: From below, G 1/2"
 Coating: Enamel (Colours shown in Zehnder catalogue),
 Chrome-plated (not all sizes)

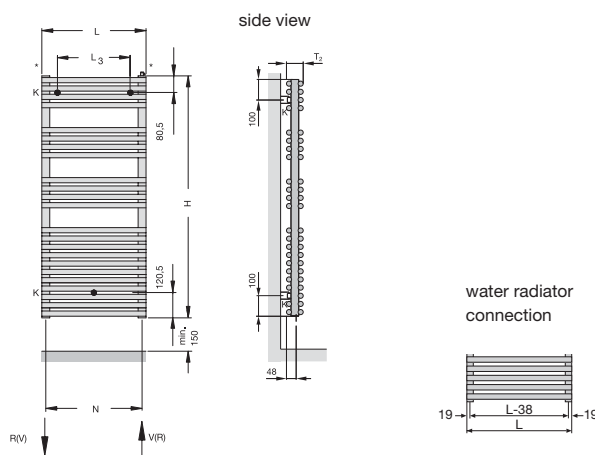

Models for closed heating systems:

Model	Overall height (mm)	Overall length (mm)	Heat capacity (W)		Maximum immersion Electric rating required (W)
			$\Delta T=50K$	$\Delta T=60K$	
LFD-120-050	1161	496	855	1075	750
LFD-120-060	1161	596	1017	1276	900
LFD-150-050	1441	496	1065	1339	900
LFD-150-060	1441	596	1266	1588	1200
LFD-180-050	1761	496	1298	1635	1200
LFD-180-060	1761	596	1543	1941	1200



Zehnder Group
Export Division
Information Office
Almweg 34
D-77933 Lahr
Tel. +49 (0) 7821 586 392
Fax +49 (0) 7821 586 406
zehnderexport@zehndergroup.com
www.zehnder.eu



Zehnder Group
Export Division
Information Office
7, rue Jean Mermoz
F-91031 Evry Cedex
Tél 33 1 69 36 16 15
Fax 33 1 69 36 15 33
export@zehndergroup.com
www.zehnder.eu

zehnder